

New Pajero Installation Instruction

Install and install the product Please read this installation manual carefully

Please keep this manual properly

Installation Precautions

- Before installing the tailgate, check the status of the original tailgate (the door gap is stable)
- Check the appearance of the vehicle before installation to take pictures of the scratches and inform the owner
- After the product is installed, it is necessary to perform tailgate learning to work properly.
- All the pictures in this manual are for reference only. Pictures and objects may differ, but the installation method is the same.
- In order to facilitate your installation, please read the instruction manual of the product carefully before installation; care should be taken to protect the surface of your car and prevent scratches during installation.
- Please check regularly that all accessories connected with the car are loose to ensure safe use.

Height setting

Raise the tailgate to the ideal height, press the tailgate to install the switch button, 3-5 seconds will appear "beep" a long ring, the handle will release, then press the tailgate button to close, the tailgate will close in place.



cable instruction



left electric pole

right electric pole



power cable

tee connection cable

components list

编号	配件名称	数量	图片
①	left electric pole	1	
②	right electric pole	1	
③	left lower bracket	1	
④	left upper bracket	1	
⑤	right lower bracket	1	
⑥	right upper bracket	1	
⑦	bracket screws	4	
⑧	front switch cable	1	
⑨	OBD socket	1	
⑩	rivet	1	
⑪	power cable	1	
⑫	suction lock	1	
⑬	Below lock	1	
⑭	Lock screw	1	
⑮	tee connection cable	1	
⑯	control box	1	
⑰	tail door button	1	
⑱	Hole puncher	1	

installation steps

install brackets and electric poles




1. as shown in the picture, remove the plaque and the original car electric pole.



2. Remove the right upper ball from the original car.



3. Install the special upper right bracket of our company. As shown in the picture, the original vehicle ball head uses our balance screw fixing bracket.

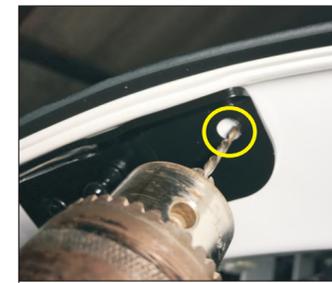

4. Drill holes in the hole of the bracket with our drill



5. Remove our special bracket and continue drilling along the fixed point



6. In the hole position of the hole, use the rivet gun to rivet



7. Rivets make a good sketch



8. Install the right upper bracket of our company. Use the flat head screws of the original hole and the round head screws of our company.




9. Install our right brace with the poles on the ends facing up




10. Install the left upper bracket of our company, same as the right bracket installation method




11. Install our company's left lower bracket, (ball head toward the outside of the body) with our

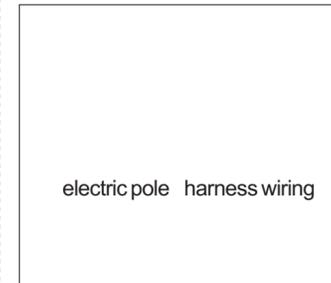

electric pole harness wiring

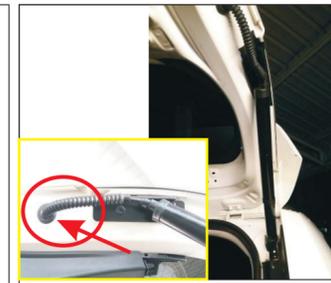

12. In the bracket above the punch strut line through the hole to the tail door cover

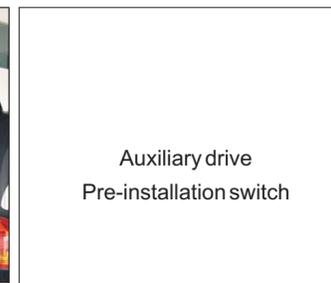


Auxiliary drive Pre-installation switch




13. The electric pole cable passes through the hole and goes along the yellow cable to the tailgate



15. Remove the original car yellow 20A fuse

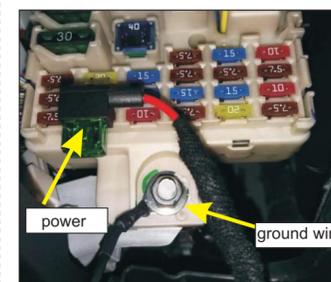

16. Plug in our power socket, the grounding screw below the power supply to our ground wire

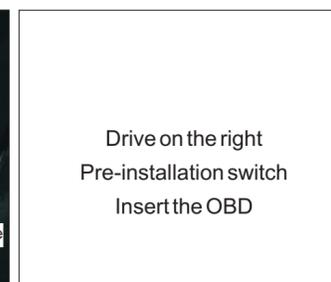


Drive on the right Pre-installation switch Insert the OBD



17. Remove the trim panel on the right main driving



18. Remove the original car empty button, install the front switch button

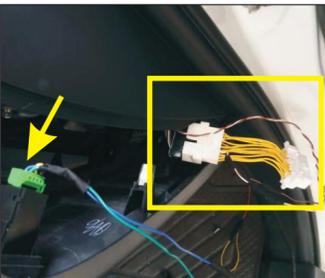

19. As shown in the figure before the switch button plug, find the original car protocol below the switch to plug our OBD



20. OBD insertion below switch before main driving



27. Unplug the original car socket plug our front switch adapter

Install the control box

 Before the restoration of the plaque check

33. After installation, please check:
1. Is the screw replaced with a special screw?
 2. Is the screw snaking or playing?
 3. socket is inserted in place
 4. Does the suction lock work?
 5. Whether the harness is damaged or pinched during the wiring process
 6. Whether the remote controller or the main driving switch button can open or close the tailgate



Press the tailgate button to close the door




Original car open door button

The power cord Forward switch line.




21. The co-pilot's power cable is routed along the yellow arrow line to the tailgate cover

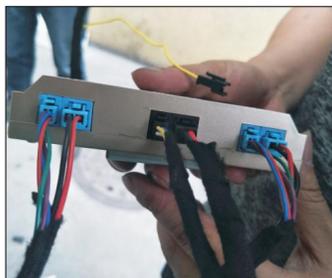

28. control box plug by color plug, pay attention to check whether inserted in place



29. White plug of control box inserted, and finally plugged in purple socket

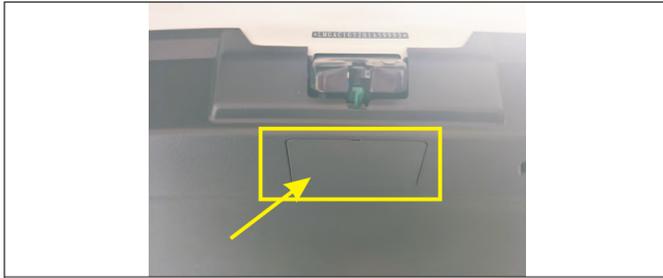

 When the tailgate cannot be opened normally, find the original car emergency safety lock in the trunk and open the emergency cover. Pull emergency switch to open

Frequently asked questions

1. the bracket is installed in reverse: the door is not closed
2. The bracket screws are not replaced as required: the door is not closed properly and the rod is damaged
3. control box connector is not inserted in place, loose: open or close the door without force or force
4. The club head and retainer are not installed: The lever is released during use (check after installation)
5. the connector is not inserted in place, off: functional failure
6. electric suction lock off center: the door is not closed, the door gap is large, tight pull leads to open the door loud
7. the new car is not installed for a long time to start the car caused by electricity: switch door is not normal, need to re-fire
8. More than 5 kg of noise insulation cotton on the tailgate may affect the door opening and closing force
9. need to learn after the first installation or power off: long press to install the back door closing button 3-5 seconds to hear a long sound, then release the handle and then press the door down to hear the "click" 2 sound, learning success (No study will appear abnormal opening and closing doors)
10. When the ball head is not correct, the non-linear ball head can rotate 360°




Anti-pinch function: 1. Anti-clamping: When the obstacle is under the tailgate closed, when the tailgate is closed, when you encounter an obstacle, you will bounce back in the opposite direction 2. Door collision avoidance: When the obstacle is behind the tailgate Obstacles will bounce back in the opposite direction

 Note: When the door is closed, the sides of the strut part must be heavy, so do not try the side clamp. Damage is not responsible



22. Before the main driving switch, the OBD line is routed along the yellow arrow line to the tailgate cover

Install suction lock

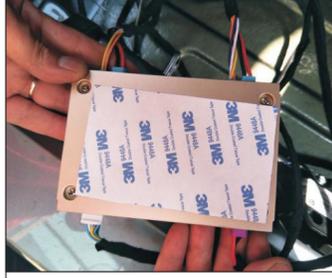

30. Use our company 3M glue to stick on the back of the control box.



31. Control box installation position, with our screws, gaskets, mesons

Fault phenomenon	Troubleshooting method
The original car remote control did not work	Yellow control line is connected
Not working after installation is complete	1. Check whether the positive power supply is connected with 12V-16V 2. Check if the power line fuse is inserted 3. check whether the ground is connected
Guan Wei Men Pass not in place	1. Whether the left and right brackets of the struts are installed in reverse 2. Whether the control box sockets are inserted well 3 whether the bracket is replaced with our special screws 4. There are two vinyl glues on the left and right sides of the original tailgate cover.
The original car remote controller cannot be closed	Whether there is learning after loading, the first time you need to install a car, you need to press the rear door. Press key to learn once
The tailgate can't go halfway up	1. Whether the left and right brackets of the struts are installed in reverse 2. Whether the control box sockets are inserted well 3 whether the bracket is replaced with our special screws Disclaimer



Tail door height setting
Raise the tailgate to the ideal height, press the tailgate to install the switch button, 3-5 seconds will appear "beep" sound, release the handle, press the tailgate again, The key is off, the tailgate is closed, and then there are two "squeaks", that is, the tailgate is completed.



23. Remove the original car lock



24. Install our special lock, fixed with the original car screws

Install tailgate button



32. Remove the trim plate and install the end button of our company. The rear door socket and the socket of the three-way wiring harness

Disclaimer

The related problems and losses caused by improper installation and use are not covered by our company's warranty. Please read this manual carefully before use. Please read it carefully after you read it for future reference. The picture is for reference only and the product shall prevail in kind.

Instructions for use




Press the front switch button to open/close the tailgate



Press the remote control unlock button for 3 seconds to open/close the tailgate



25. Remove the original car door lock, install our electric suction, use the original car screws

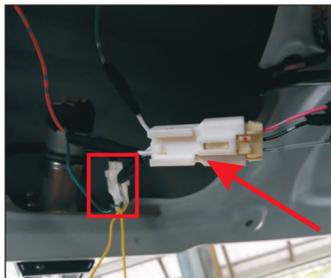

26. Unplug the original car seat at the door lock and insert the three-way adapter socket of our company. The white socket of the electric lock and the socket of the three-way wiring harness are inserted.

33. Learn the back door and restore the plaque (see below for learning methods) ▼

After the installation is complete, you must set the tailgate learning. Please make sure the door can be turned on and off.
Height, press the rear door to install the switch button, 3-5 seconds to hear a long bang, release the handle, click again
The tailgate button closes the door, the tailgate closes in place, and then you hear two clicks, that is, the tailgate is completed, if not
If you hear "squeaking" two times, your study will be unsuccessful and you will need to learn again. If you do not close the door, use your hand to assist in learning. Push the door tightly